

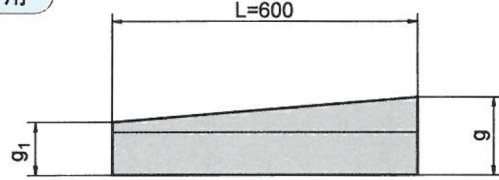
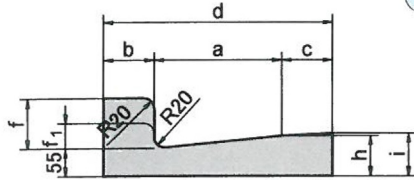


すりつけ用

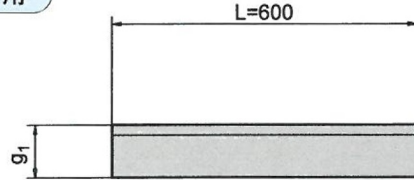

切り下げ用

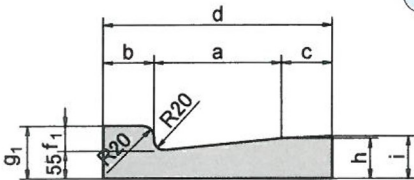

呼び	寸法 mm										質量 kg
	a	b	c	d	f	f ₁	g	g ₁	h	i	
250A	250	100	—	350	100	—	155	—	80	—	48
250B	250	100	100	450	100	—	155	—	80	85	60
すりつけ用(50)	250	100	100	450	100	50	155	105	80	85	56
” (20)	250	100	100	450	100	20	155	75	80	85	54
切り下げ用(50)	250	100	100	450	—	50	—	105	80	85	52
” (20)	250	100	100	450	—	20	—	75	80	85	48
250C*	250	—	100	350	—	—	—	—	80	85	37
250D*	250	50	100	400	100	—	155	—	80	85	48
300A*	300	100	—	400	100	—	155	—	85	—	54
300	300	100	100	500	100	—	155	—	85	90	67
すりつけ用(50)	300	100	100	500	100	50	155	105	85	90	63
” (20)	300	100	100	500	100	20	155	75	85	90	61
切り下げ用(50)	300	100	100	500	—	50	—	105	85	90	59
” (20)	300	100	100	500	—	20	—	75	85	90	55
300C*	300	—	100	400	—	—	—	—	85	90	44
300D*	300	50	100	450	100	—	155	—	85	90	55
350A*	350	100	—	450	100	—	155	—	90	—	60
350	350	100	100	550	100	—	155	—	90	95	74
すりつけ用(50)	350	100	100	550	100	50	155	105	90	95	70
切り下げ用(50)	350	100	100	550	—	50	—	105	90	95	66
350C*	350	—	100	450	—	—	—	—	90	95	51
350D*	350	50	100	500	100	—	155	—	90	95	62

*250C, 250D, 300A, 300C, 300D, 350A, 350C及び350Dは、東京都建設局型の規格です。