





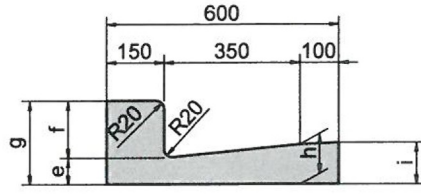




埼玉県型鉄筋コンクリートL形

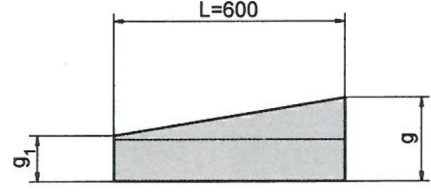



すりつけ用

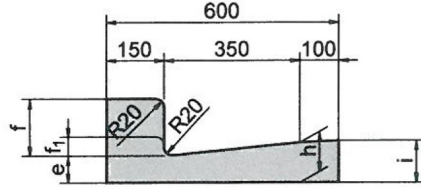

切り下げ用

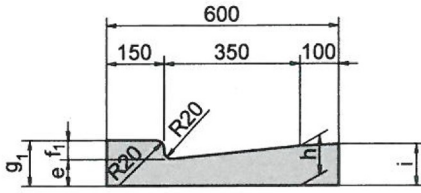

縁塊

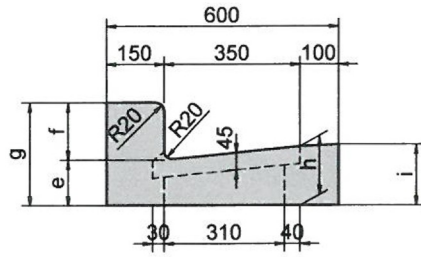

呼び	寸法 mm							質量 kg
	e	f	f ₁	g	g ₁	h	i	
350 I	70	150	—	220	—	105	110	109
すりつけ用(50)	70	150	50	220	120	105	110	98
” (20)	70	150	20	220	90	105	110	95
切り下げ用(50)	70	—	50	—	120	105	110	87
” (20)	70	—	20	—	90	105	110	81
350 II	100	150	—	250	—	135	140	136
すりつけ用(50)	100	150	50	250	150	135	140	125
” (20)	100	150	20	250	120	135	140	121
切り下げ用(50)	100	—	50	—	150	135	140	114
” (20)	100	—	20	—	120	135	140	107
350縁塊	120	150	—	270	—	155	160	113